


# DIESEL GENERATOR DATA SHEET

## HIPOWER DIESEL GENERATOR Powered by Cummins Model:PGD50C

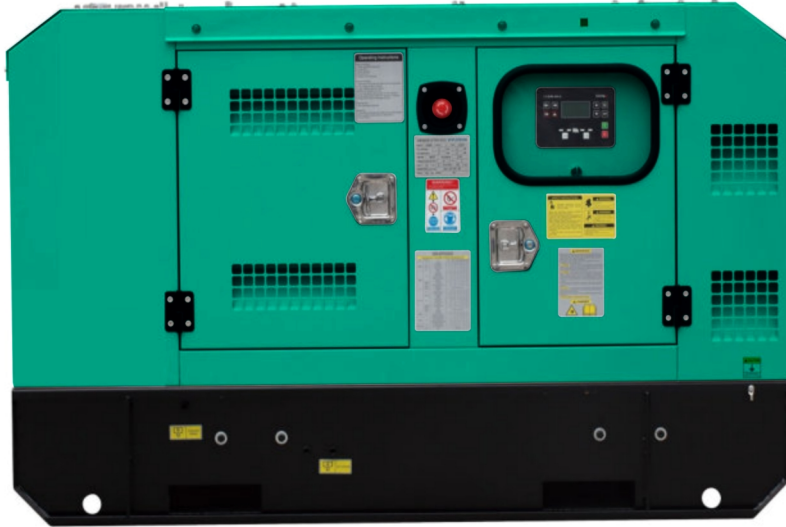

### I . GENERAL DATA

Prime Power	kW/kVA	36	45
Standby Power	kW/kVA	40	50
Frequency	Hz/rpm	60	1800
Voltage	V	440	254
Current	A	59	
Connection	/	3P 4W/Y	
Rated Power Factor	/	0.8	
Open Type (LxWxH)	mm	1800x850x1330	
Open Type(Weight)	kg	830	
Silent Type (LxWxH)	mm	2300x1100x1290	
Silent Type(Weight)	kg	1120	



■ Available for voltages 400/230V, 480/277V, 380/220V, 440/254V, 416/240V,220/127V, 208/120V

■ All datas based on ISO 3046, altitude 100m (328ft), barometric pressure 100kPa (29.53inHg), air temperature 25°C (77°F), relative humidity 30%.

■ Please contact with engineer for correct generator capacity selection when the load application can't meet with the standard reference.

■ diesel generators comply with standards :ISO8528,ISO 14000,ISO3046,GB755,BS5000,VDE0530,IEC34-1

## II. STANDARD CONFIGURATION

Engine	Cummins, including air filters, fuel filters, oil filter, starting motor and charging alternator etc.
Alternator	brushless AC alternator
Radiator	50°C, fan protective shroud
Base Frame	≤550KW: base mounted fuel tank, anti-vibration pads, battery holder
	>550KW: channel steel base frame, anti-vibration pads, battery holder
Circuit Breaker	≤1250A : Molded case circuit breaker(MCCB)
Control System	DEEP SEA 6020
Start Battery	Dry charged battery, available for 6 times starts under standard condition; connection cables.
Installation Accessories	Bellow, Elbow and flange, Exhaust silencer, etc.
Tool	standard

## III. OPTIONAL CONFIGURATION

Engine Accessories	◇ Heavy-duty air filter ◇ Coolant heater ◇ Lub oil heater ◇ Fuel and Water Separator
Alternator And Accessories	◇ Stamford ◇ Leroy Somer ◇ Marathon ◇ Anti condensation heater ◇ PMG
	◇ High voltage _____kV
Cooling System	◇ 50°C radiator ◇ Heat exchanger + water cooling tower + External water circulation pumping system
	◇ Remote horizontal water tank system
Control System	◇ AMF ◇ Parallel ◇ Practical type in low temperature environment ◇ Control Screen Heater
	◇ Other (Comap、DEIF)
Circuit Breaker	◇ 3/4 poles ◇ Fixed/handcart type ◇ Electric mechanism
Automatic Transfer Swtich	◇ ATS cabinet
Start Battery	◇ Nickel-cadmium battery ◇ Maintenance-free battery ◇ Power charger and selector
	◇ Charging current meter
External Fuel Tank	◇ 500L ◇ 1000L ◇ 1500L ◇ 2000L ◇ 2500L ◇ 3000L ◇ 4000L ◇ 5000L

## IV. ENGINE DATA

Engine Model	4BT3.9-G2	Engine Power	44	kW
Aspiration	Turbocharger	Displacement	3.9	L
Type	In-line	Bore×Stroke	102×120	mm
No. of Cylinders	4	Compression Ratio	18: 1	
Governor Type	Electronic Governor	Rated Speed	1800	RPM

### ■ Fuel System

Prime Power Fuel Consumption	10.7	L/h	Standby Power Fuel Consumption	11.7	L/h
Fuel #	ASTM D975 No.2-D or BS2869 1998 Class A1, A2		Injection System	BYC A	

### ■ Lubrication System

Lub Oil Capacity	10.9	L			
Lub #	API CF-4 15W40		Max. Temperature	121	°C

### ■ Coolant System

Coolant Capacity	19	L	Max. Top Tank Temp.	110	°C
Std. Thermostat (Modulating) Range	83 - 95 °C		Fan Drive Method	Shaft drive	
Cooling Fan Air Flow	252	m3/min			

### ■ Air Intake System

Combustion Air Flow	3.18/3.26	m3/min	Maximum Air Intake Restriction	3.7	kPa
---------------------	-----------	--------	--------------------------------	-----	-----

### ■ Exhaust System

Exhaust Gas Flow	6.06/6.42	m3/min	Max. Back Pressure	10	kPa
Exhaust Gas Temp	≤373	°C	Exhaust Pipe Size	φ76	mm

# DIESEL GENERATOR DATA SHEET

## ■ Starting System

Start Mode                      DC24V Electric start                      Battery                      2×120                      Ah

## V. ALTERNATOR DATA

Alternator Model	SLG184H	Rate Power	37.5/46.9	kW/kVA
PF.	0.8	Voltage	440/254	V
Phase	3	Frequency	60	Hz
Connection	3P 4W/Y	Bearing	1	
Winding Pitch	2/3	Proteccion Class	IP21	
Insulation Class	H	Efficiency	90%	
Tel. Influence	TIF: <50	Voltage Regulation	±1.0%	
Harmonic Coefficient	THF: <2%	AVR	AS440	
Voltage Adjust Scope	≥±5%	Excitation System	Self Excited	

## VI. CONTROL SYSTEM DATA

**MODEL DSE6020**

### ■ Main feature

Electronic J1939 (CAN) and nonelectronic MPU and alternator sensing engine support for diesel, gas and petrol engines all in one variant.

With a number of flexible inputs, outputs and protections, the modules can be easily adapted to suit a wide range of applications.



### ■ Key Function

- ▲Utility voltage sensing
- ▲Generator/load power monitoring (kW, kV A, kV Ar, pf)
- ▲Generator overload protection (kW)
- ▲Efficient power save mode
- ▲Mains and generator closed via front panel
- ▲4 configurable DC outputs
- ▲4 configurable analog./digital inputs
- ▲6 configurable digital inputs
- ▲Configurable staged loading outputs
- ▲CAN, MPU and alternator speed sensing in one variant
- ▲3 engine maintenance alarms
- ▲Engine speed protection
- ▲Engine pre-heat
- ▲Multiple date and time scheduler
- ▲Engine idle control for starting & stopping
- ▲Fuel pump control
- ▲Configurable remote start input
- ▲Alternative configuration
- ▲Alarm including common alarm,common electric and common shutdown
- ▲LCD and LED alarm indication
- ▲Configurable event log (50)
- ▲Heated display option available

☆ *For more information, please visit the [official website](#)*


# DIESEL GENERATOR DATA SHEET

- ▲Support for 0-10 V & 4-20 mA oil pressure sensors
- ▲Battery voltage monitoring
- ▲Start on low battery voltage

## VII. WARRANTY POLICY

1. Guarantee for one year or 1000 hours (accord to whichever reach first) from ex-factory date. Refer to 《 Diesel Generator Warranty Manual》 for more details.
2. Wearing parts( filters), incorrect man-made operation, maintenance failures are excluded from the warranty policy

## VIII. DRAWING (for illustration purposes only)

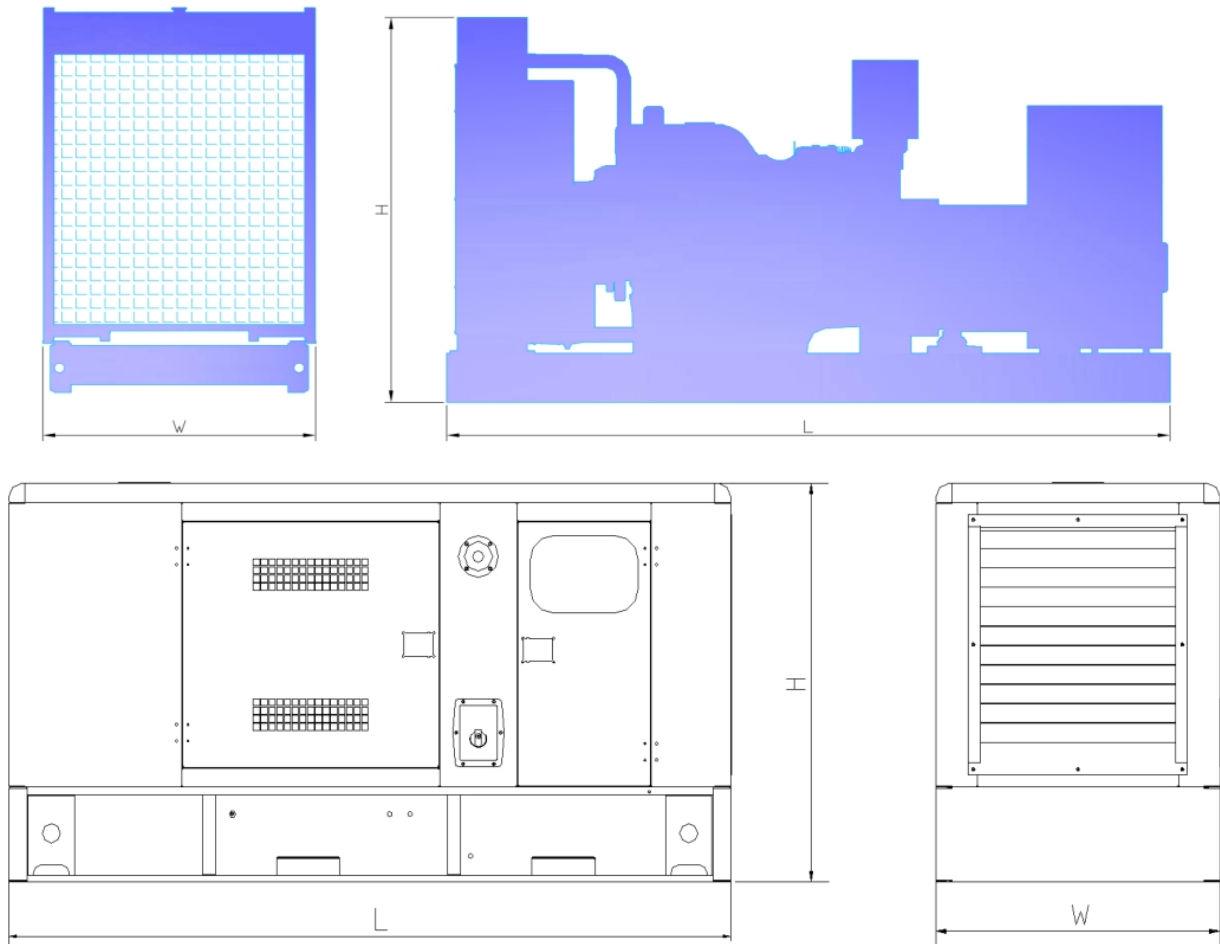

Cumple con UL STD 2200 Certificado para  
CSA STD C22.2 # 100 Certificado para CSA  
STD C22.2 # 14

